


JABRA PRO 935

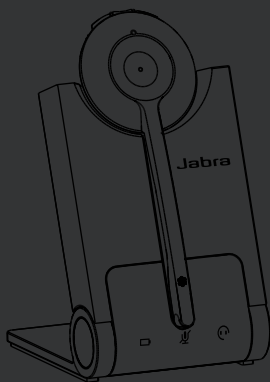

User Manual

jabra.com/pro935

A BRAND BY



© 2014 GN Netcom A/S. All rights reserved. Jabra® is a registered trademark of GN Netcom A/S. All other trademarks included herein are the property of their respective owners.

MADE IN CHINA

MODEL WHB005HS/
WHB005BSU



Declaration of Conformity can be found on
www.jabra.com/CP/US/declarations-of-conformity

1. WELCOME	4
2. PRODUCT OVERVIEW	5
3. CHARGE THE HEADSET	8
4. HOW TO WEAR	10
5. HOW TO CONNECT.....	12
6. HOW TO USE	13
7. VOICE GUIDANCE	15
8. BASE LED INDICATORS	16
9. SOFTWARE	17
10. ADVANCED SETTINGS.....	18
11. SUPPORT	21
12. TECHNICAL SPECIFICATIONS	22

1. WELCOME


Thank you for using the Jabra PRO 935. We hope you will enjoy it!

JABRA PRO 935 FEATURES


- Plug and play simplicity
- Wireless freedom - up to 100m/300ft from base
- 12 hours talk-time

2. PRODUCT OVERVIEW

2.1 HEADSET

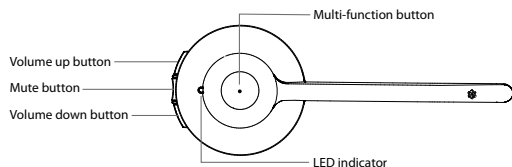


2.2 BASE

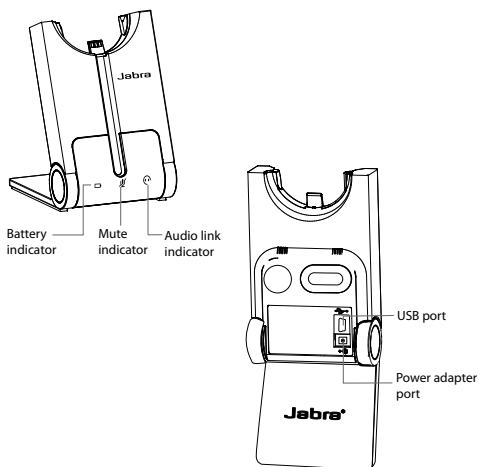


FOLDABLE BASE STAND

The Jabra PRO 935 base stand can be folded into three positions: open, closed and standing.

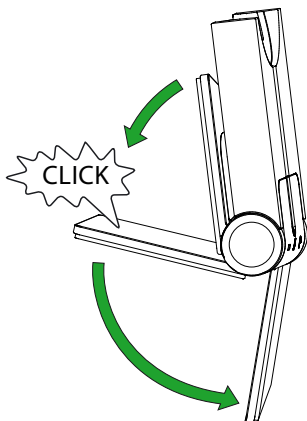


2.3 OPTIONAL ACCESSORIES


The following Jabra PRO accessories are available separately. Visit jabra.com for a full accessory overview.



Neckband attachment



Replacement headband attachment



Replacement earhook, with
earbuds



Replacement ear cushions




AC power cable



Charging cable






3. CHARGE THE HEADSET

The headset will charge when docked in the base, and the base is connected to a power supply.




It takes approx. 3 hours to charge the headset.

3.1 HEADSET BATTERY STATUS

WHAT YOU SEE	BATTERY LEVEL
	High
	Medium
	Low
	Very low
	Battery charging

4. HOW TO WEAR

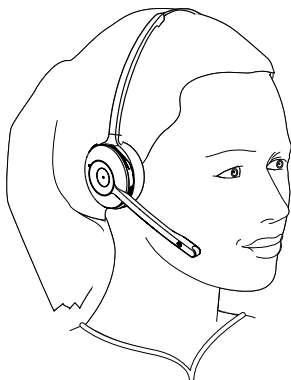


The Jabra PRO 935 headset can be worn in three different wearing-styles:

- Headband
- Earhook (optional accessory)
- Neckband (optional accessory)


All wearing-styles can be worn on either the left or right ear.

NOTE: It is important to position the microphone close to the mouth for maximum noise cancellation.

4.1 HEADBAND

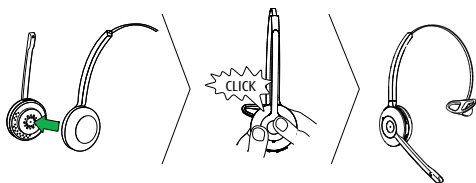

4.2 EARHOOK (OPTIONAL ACCESSORY)

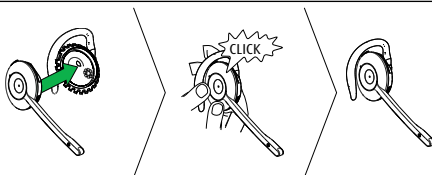

4.3 NECKBAND (OPTIONAL ACCESSORY)




NOTE: The neckband or earhook can be purchased on jabra.com


5. HOW TO CONNECT




5.1 CONNECT TO PC (SOFTPHONE)

1. Plug the base into a power supply using the supplied wall charger.
2. Connect the base to your PC using the supplied USB cable.
3. Dock the headset in the base.

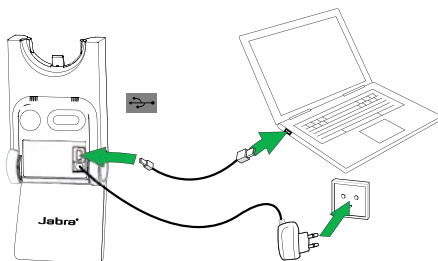


6. HOW TO USE

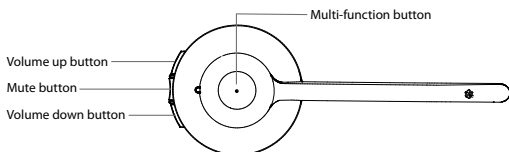

	FUNCTION	ACTION
	Headset on/off	Press (1 sec) the Multi-function button to turn on. Press (3 secs) to turn off
	Answer/end call	Tap the Multi-function button
	Reject call	Double-tap the Multi-function button
	Initiate call	Tap the Multi-function button when not on a call
	Adjust speaker volume	Tap the Volume up or Volume down button
	Mute/un-mute	Tap the Mute button

6.1 MULTIPLE CALL HANDLING

The headset can accept and handle multiple calls.

	CALL FUNCTION	HOW TO DO IT
	End current call and answer incoming call	Tap the Multi-function button
	Switch between held call and active call	Press and hold (2 secs) the Multi-function button
	Put current call on hold and answer incoming call	Press and hold (2 secs) the Multi-function button
	Reject incoming call, and continue active call	Double-tap the Multi-function button


7. VOICE GUIDANCE










The headset plays a variety of voice announcements to indicate status and connection guidance.

LISTEN	WHAT YOU HEAR
	Power on
	Power off
	Low battery
	PC connected
	PC disconnected
	Mute on
	Mute off

8. BASE LED INDICATORS

The Jabra PRO 935 base has three LEDs to indicate battery, call status and events.



LED	EVENT
	Battery charging (slow flash)
	Full battery
	Low battery
	Very low battery (fast flash)
	Sleep mode (slow flash)
	Unknown battery status
	Microphone muted
	Active audio link between headset and base
	Searching for headset

9. SOFTWARE

9.1 JABRA PC SUITE

Jabra PC Suite is a collection of software designed to support, manage and enable optimal functionality for Jabra devices.

Download the latest version - jabra.com/pcsuite

It is highly recommended to install Jabra PC Suite.

9.2 UPDATE FIRMWARE

Updating firmware improves performance or adds new functionality to your Jabra PRO 935. Jabra PC Suite must be installed to update firmware.

To update firmware:

1. Connect to a PC using the USB cable.
2. Download and install Jabra PC Suite.
3. Launch Jabra Firmware Updater, or check for the latest firmware via Jabra Control Center.

10. ADVANCED SETTINGS


Five advanced settings can be configured using the headset.

















- Mute reminder tone
- Base ringtone
- Base ringtone volume
- Intellitone
- Wireless range


10.1 CHANGE THE ADVANCED SETTINGS





1. Wear the headset, and simultaneously press and hold (5 secs) the volume buttons on the headset until you hear 'setup', and then release the buttons.
2. Tap the Multi-function button to cycle through the settings (see table below). Each setting will be announced in the headset. To change a setting, use the volume buttons to cycle through the setting values, and tap the Multi-function button to select the value.
3. When finished, simultaneously press and hold (5 secs) the volume buttons until you hear 'goodbye', then release the buttons. The base will reset and update the settings.

10.2 LIST OF ADVANCED SETTINGS



SETTING LIGHT	SETTING	VALUE LIGHT	VALUE
 x1	Mute reminder tone		On
			Off
 x2	Base ringtone		Ringtone 1
			Ringtone 2
			Ringtone 3
			Ringtone 4
			Ringtone 5
 x3	Base ringtone volume		High
			Medium
			Low
 x5	Intellitone		Peakstop
			Peakstop and Intellitone



SETTING LIGHT	SETTING	VALUE LIGHT	VALUE
 x6	Wireless range		Normal range
			Low range
			Very low range

11. SUPPORT

11.1 FAQ

View the full FAQ on jabra.com/pro935.

11.2 HOW TO CARE FOR YOUR JABRA DEVICE

- Always store the headset with the power off.
- Avoid storage at extreme temperatures (below -20°C/-4°F or above 45°C/113°F). This can shorten battery life and may affect speaker operation.
- Do not expose the headset or base to rain or other liquids.

12. TECHNICAL SPECIFICATIONS

JABRA PRO 935	SPECIFICATION
Weight:	Headset: 27g Base: 162g
Dimensions:	Headset: H 131mm x W 50mm x 18mm Base: H 118mm x W 76mm x L 29mm
Microphones:	Noise reduction microphone
Speakers:	Wideband speaker
Operating range:	Up to 100m/300ft (class 1)
Talk time:	Up to 12 hours
Standby time:	Up to 7 days
Operating temperature:	-0°C to 40°C (32°F to 104°F)
Storage temperature:	-20°C to 45°C (-4°F to 113°F)

